



Secondary Glazing Systems

Distributed in NZ & Australia by Award Plastics Ltd


Magnetglaze Pro System

a rigid framed magnetic fixing system

Magnetglaze Pro combines the simplicity of the magnetic fixing with the aesthetic appeal of framing your plastic sheet. It comprises two parts, a rigid pvc frame profile which has the magnetic strip attached and a self-adhesive metal strip. Mitre beading is also supplied to assist you in cutting neat, accurate corners. This system is particularly suitable for windows requiring quick or repeated removal.



Magnetglaze Pro is sold in packs of 10 x 2.44m or 10 x 1.22m lengths, in white or brown. Complete packs can be supplied directly from us or alternatively, single lengths can be purchased from one of our accredited agents via the Magnetglaze Pro secondary glazing page on our website.

Magnetglaze Pro is intended for internal use only and NOT recommended for use with glass. Always fit to the main frame and not to opening windows.

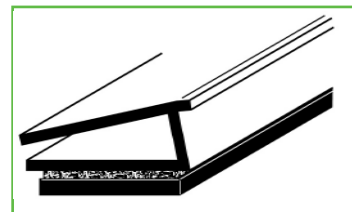

HELPFUL HINTS - For larger windows (1200mm x 1200mm or bigger) we strongly recommend placing a couple of screws under the glazing panel to support the sheet. This removes the risk of the sheet slipping down and becoming detached.

TOOLS REQUIRED - Fine tooth saw, tape measure, mitre block and pencil.



Measuring up for your Plastic Sheeting


1. Measure the existing window pane, vertically (measurement A) and horizontally (measurement B). This is the visible glass only and does not include any frame.
2. Add 30mm to each measurement A & B. This will give you the size of the sheet required. Also ensure you have a minimum 20mm mounting surface on each side of your window.

Measuring up for your Magnetglaze Pro

3. You will require 2 lengths at measurement A plus 33mm and 2 lengths at measurement B plus 33mm for your window. Add these together to find out how many lengths of each size you will need.

USING MAGNETGLAZE PRO STEP BY STEP

4. Using a suitable cleaner, such as Easyfix® Surface Preparation Wipes, clean the window surround to ensure a grease-free surface, this provides the best results for the adhesion of the tape.
5. Remove the white metal strip from the length of Magnetglaze Pro.
6. Working with your plastic panel, measure the side to which you want to place a strip of Magnetglaze Pro. Add 3mm to this and squarely cut a length of Magnetglaze Pro to suit. Repeat for each side of the panel.
7. Using the outer corner as a reference (see diagram), insert the mitre bead and cut a 45° mitre using the fine toothed saw and mitre block. Repeat this step for all lengths.
8. Now fit the Magnetglaze Pro to the edges of the panel.
9. Hold the panel to the window frame so that it overlaps equally on each edge.
10. Draw a pencil line around the sheet on the frame.
11. Cut and fit the white metal strip to the window frame, sticking it just inside the pencil marks.
12. Offer up the glazing panel to the window and click into place.



It is always best to remove double glazing in summer to allow ventilation.

PLEASE READ INSTRUCTIONS THOROUGHLY BEFORE CUTTING OR FITTING ANY SYSTEM



Award Plastics
& Displays

Award Plastics & Displays Ltd, 42 Wordsworth St, Sydenham, Christchurch 8240.
easyfix@awardplastics.co.nz ~ 0800 426 292 ~ www.awardplastics.co.nz

EASYFIX® is a registered trade mark of Tubeway (Sales) Limited, manufacturers and distributors of Easyfix® products in the UK.